

UR3.13 - MAXIMUM OBSERVABLE SHAKING (MOS) maps of Italy

Gaetano Zonno¹, Gemma Musacchio¹, Fabrizio Meroni¹, Roberto Basili¹, Walter Imperatori², P. Martin Mai²



Istituto Nazionale di Geofisica e Vulcanologia



Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

Introduction

The main goal of UR 3.13 is to establish a work flow for a multi-layer map that includes the seismicity of Italy in terms of Maximum Observable Shaking (MOS), and the near-field/far-field boundaries (NF/FF) with respect to the major seismogenic faults mapped within the DISS database. Here we will discuss only the procedure to derive the MOS-map of Italy.

BroadBand waveforms

For each Maximum Credible Earthquake (MCE) and its Typical Fault (TF) associated to a SZ, amplitude spectra for deterministic Low Frequency and stochastic High Frequency synthetic seismograms are reconciled at intermediate frequency, where their domain of validity overlaps.

Towards Maximum Observable Shaking maps

BroadBand ground motion scenario computed for a single fault (TF) and MCE floats along the SZ allowing to derive a map that plots the Maximum of the Observable Shaking according to that scenario.

So far the procedure was entirely tested on the Macro Region MR4 (central-northern Apennine), while more detailed analysis is done on the MCE and TF of the Colfiorito composite source earthquake. Here we discuss some aspects of the procedure.


Database of Seismogenic Individual Sources



The Database of Individual Seismogenic Sources (DISS) is a repository of geologic, tectonic, and active-fault data for the Italian territory (DISS Working Group, 2007; Basili et al., 2008).

Typical Faults for the macro region MR3

Typical Faults for the MR3 (Central Northern Apennines East), with prevalent reverse faulting. The TFs are the black rectangles whereas the red rectangles show the TFs after grouping.

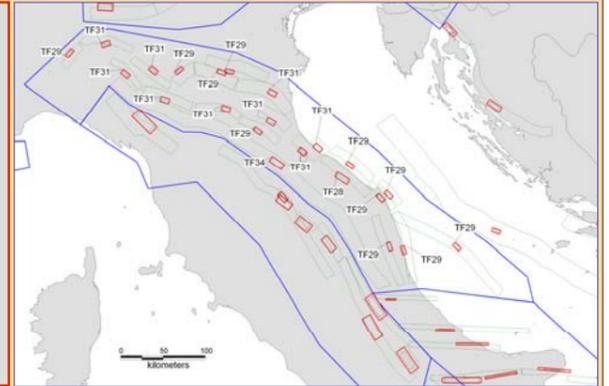

The parent SZ (composite sources from DISS) are shown in green.

Adopted criteria for grouping the Typical Faults for Italy

Faulting types based on rake (deg)

If Rake > 315 or Rake < 45 then TF = Left lateral;
If Rake >= 45 and Rake <= 135 then TF = Reverse;
If Rake > 135 and Rake < 225 then TF = Right lateral;
If Rake >= 225 and Rake <= 315 then TF = Normal.

Depth of the fault top (km)

If Depth <= 4.0 then TF Depth = 1.0;
If Depth > 4.0 and Depth <= 10.0 then TF Depth = 5.0;
If Depth > 10.0 then TF Depth = 10.0.

Magnitude (Mw)

If Mw <= 5.9 then TF Mw = 5.9;
If Mw > 5.9 and Mw <= 6.3 then TF Mw = 6.3;
If Mw > 6.3 and Mw <= 6.7 then TF Mw = 6.7;
If Mw > 6.7 and Mw <= 7.1 then TF Mw = 7.1.


Dip angle of the fault plane (deg)

If Dip <= 30 then TF Dip = 25;
If Dip > 30 and Dip <= 60 then TF Dip = 45;
If Dip > 60 and Dip <= 90 then TF Dip = 75.

THE PROCEDURE of MOS computation

- Maximum Credible Earthquake (MCE):** it is defined for each of Seismic Zones (SZ) and associated to a Typical Fault (TF). Each SZ is subdivided with a number of TF
- Credible rupture parameters.** The MCE is modeled as a rectangular fault plane. 30 realization of stochastic slip distribution (Mai and Beroza 2002) are used to assess the rupture model
- LF wavefield:** computation of the at the site and for a given MCE and TF
- HF wavefield:** computation of the at the site and for a given MCE and TF
- Hybrid broadband at the site:** derived from merging the LF and HF spectra in the frequency domain and inverse Fourier transformed to the time domain
- Ground shaking computation (PGA from Response Spectral Acceleration, 5% damping; or SI (Housner Intensity) from Pseudo Velocity Response Spectrum, 5% damping) at the site**
- Ground shaking map:** repeat Step 3 to 6 for each point of a given GRID surrounding the TF
- MOS map:** as the TF floats along the SZ we allow the shake map to "float" as well and pick the maximum shaking at each point of the grid surrounding the SZ


HF MOS map for the Macro Area MR4

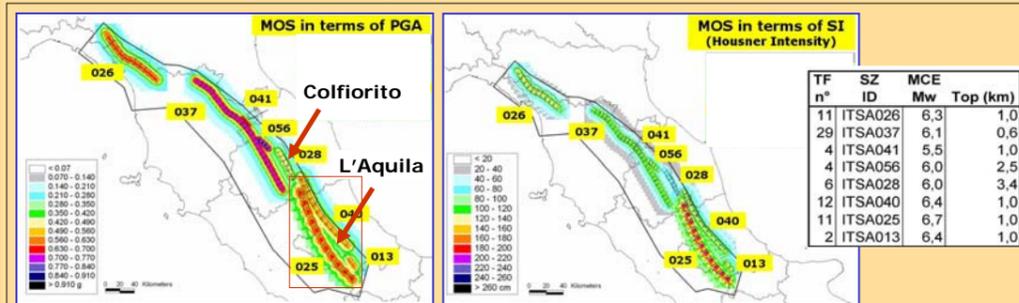

The Macro Region MR4 includes the central-northern Apennines extensional structures and some of the most relevant recent earthquakes in Italy, (i.e., 1915 Avezano and 1997 Colfiorito, 2009 L'Aquila). Top panels plot the MOS maps in terms of PGA (left) and SI (right) computed for an area of about 20 km surrounding each of the typical faults included in MR4. Yellow labels refer to the SZ names (ID) listed in the left table. The red rectangle highlights the area surrounding the 2009 L'Aquila earthquake.

Table lists the 8 SZ belonging to MR4. TF (n) is the number of TF subdivision for each SZ; ID is the identification code for each SZ; Mw is the magnitude moment for each MCE; Top is the depth to the top of TF.


Deterministic HF MOS scenario and Probabilistic map (R.P. 500 yrs)

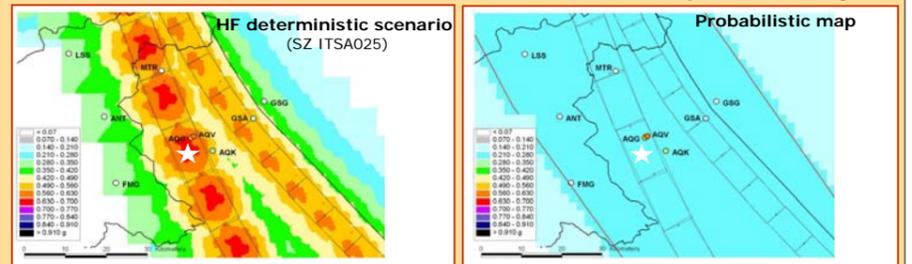

The 2009 (Mw 6.3) L'Aquila earthquake (white star) occurred within SZ ITSA025. Left panel shows a zoom-in of HF MOS map surrounding the earthquake.

The High Frequency scenario predicts (0.56-0.63 g) higher levels of PGA than those measured during the quake (0.49-0.6 g). However the PGA map (*Pericolosità sismica di riferimento per il territorio nazionale, Ordinanza PCM del 20 marzo 2003*) with return period of 500 years (http://zonesismiche.mi.ingv.it/mappa_ps_apr04/abruzzo.html [interpolated]) predicts acceleration peak of about 0.2 g, well below those measured during the quake (right panel).

ITSA028 (Colfiorito): Retrieving a BB ground motion map

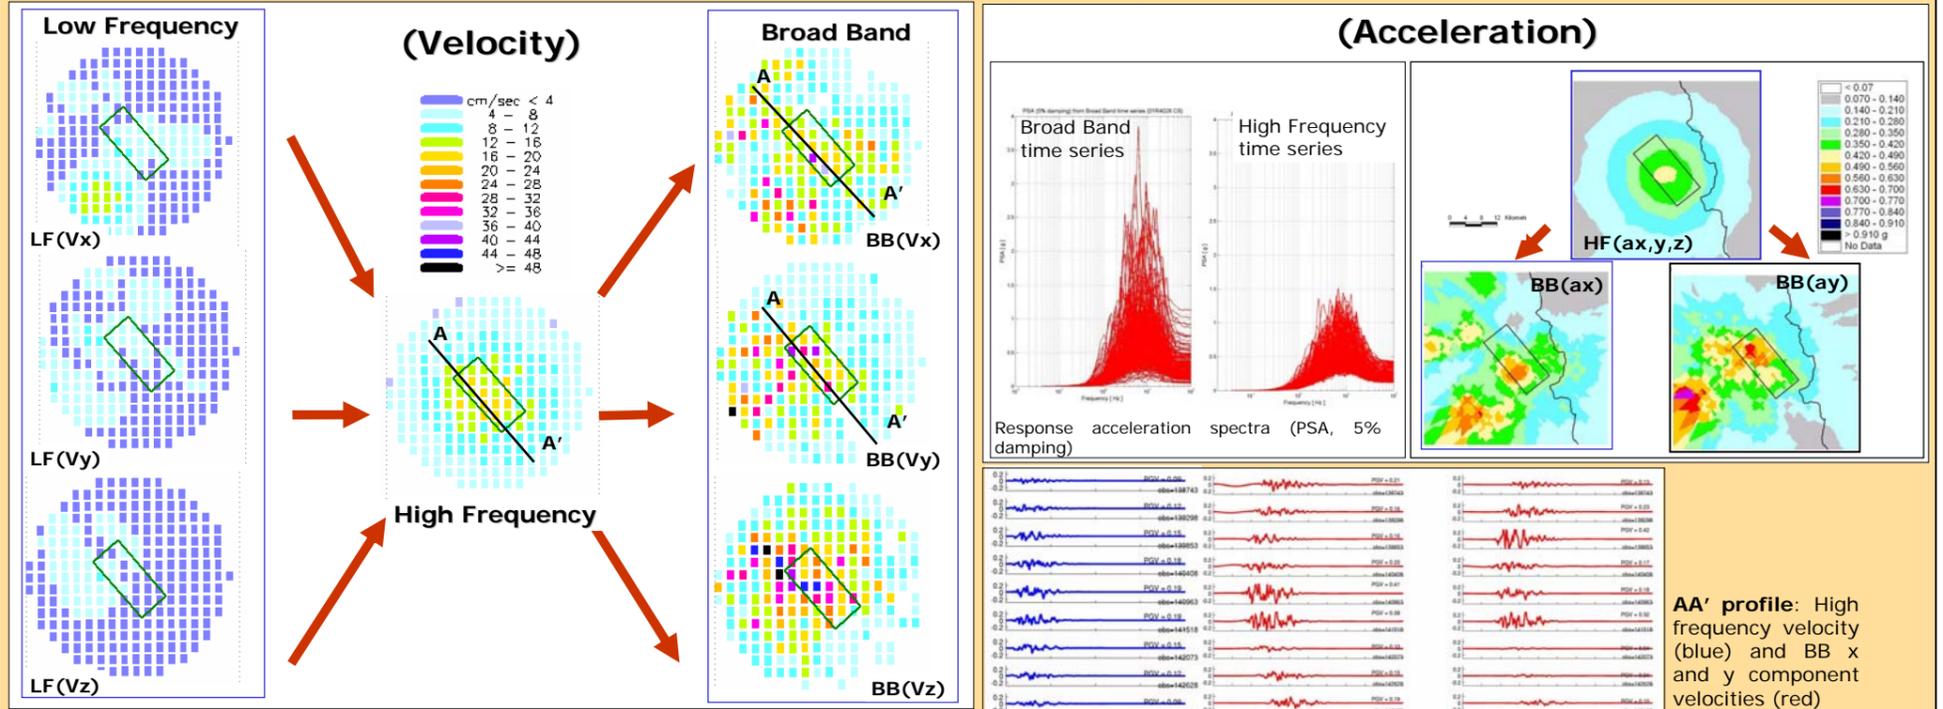


When taking into account the broadband frequency content (from Low to High frequency), ground shaking reveals the complexity of the rupture process. We can observe that the circular fault-centered shaking pattern typical of a simple High Frequency computation is replaced by a more complex distribution where high values of shaking occur both on the fault than in lobe-shaped areas surrounding it (southwestern corner on the map). However, because the process of merging a deterministic LF with a stochastic HF waveforms is not a trivial task several parameters need to be tuned up. For instance we have checked carefully the use of magnitude-dependent constant rise time and the BBtoL matching frequencies. The BB resulting ground shaking map might have spurious spots that could be avoided applying a smoothing to the plotting routine.

Stochastic rupture model

The input rupture model is defined stochastically according to Mai and Beroza (2003). Here we show the rupture simulation for the MCE ITSA028 Seismic Zone (Colfiorito), used to test BB waveforms computation discussed above.

DISS SlipReal	Rupture parameters							Correlation Function (multiplicative von Karman ACF)			
	M ₀ (Nm)	L (km)	W (km)	mech	D _{mean} (cm)	D _{max} (cm)	r	v _r (cm/s)	α ₁ (km)	α ₂ (km)	H (km)
6.0	14	8	ds	33	1.11e+018	1.12e+018	1.5	0.8	3	5	0.6

Table: Length (L); Width (W); faulting mechanism (mech); D_{mean} and D_{max} = slip; Mo=moment magnitude; r = rise time; v_r=rupture velocity ratio; parameter published in DISS are compared with those derived with the stochastic slip distribution code (SlipReal).

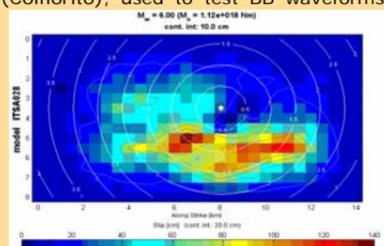

Conclusions & Outlook

- We have used a "kriging technique" to interpolate the Broad Band MOS map (g) and we can see an underlying simple regular directivity pattern which is overlain by same high/low ground-motion variations
- We are ready to calculate the BB MOS maps for Italy, making simple assumptions to group the Typical Faults and reduce computational costs
- We need to improve and solve some technical problems in the automatic procedure

ACKNOWLEDGEMENTS: This work was funded by the Italian Civil Protection Department (2007-2009 agreement with INGV - Progetto S1 - Determinazione del potenziale sismogenetico in Italia per il calcolo della pericolosità sismica)

Basili R., G. Valentise, P. Vannoli, P. Burrato, U. Fracassi, S. Mariani, M.M. Tiberti, E. Boschi (2008), The Database of Individual Seismogenic Sources (DISS), version 3: summarizing 20 years of research on Italy's earthquake geology. *Tectonophysics*, 453, 20-43. doi:10.1016/j.tecto.2007.04.014.
Basili R., Varjia Kastelic V., Valentise G. and DISS Working Group (2009), DISS3 tutorial series: Guidelines for compiling records of the Database of Individual Seismogenic Sources, version 3. - Rapporti Tecnici INGV, N. 108, download web page <http://portale.ingv.it/prodotto-scienfica/rapporti-tecnici-ingv/numeri-publicati-2009>
Lorito S., Tiberti M.M., Basili R., Piatanesi A., and Valentise G., 2008. Earthquake-generated tsunamis in the Mediterranean Sea: Scenarios of potential threats to Southern Italy. *Jour. Geophys. Res.*, 113, b01301. doi:10.1029/2007J004943.
Mai, P.M. and Beroza G., 2003. A hybrid method for calculating near-source, broadband seismograms: application to strong motion prediction. *Physics of the Earth and Planet. Int.*, 137: 183-199
Molteni C., F. Galadini, G. Valentise, M. Stucchi, R. Basili, S. Barba, G. Vannucci, E. Boschi (2008), A seismic source zone model for the seismic hazard assessment of the Italian territory. *Tectonophysics*, 450, 85-108. doi:10.1016/j.tecto.2008.01.003.
Zonno, G., Musacchio, G., Basili, R., Imperatori, W., and Mai, P. M., 2008. Stochastic and full-wavefield finite-fault round-motion simulations of the M 7.1, Messina 1908 Earthquake (Southern Italy). Poster S43C-1893 presented at the A.G.U. Fall Meeting 2008, San Francisco (CA-USA), December 2008. <http://hdl.handle.net/2122/4742>